

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
21 December 2000 (21.12.2000)


PCT

(10) International Publication Number
WO 00/76590 A1

- (51) International Patent Classification⁷: A62B 35/04 (74) Agents: REES, Alexander, Ellison et al.; Urquhart-Dykes & Lord, 30 Welbeck Street, London W1M 7PG (GB).
- (21) International Application Number: PCT/GB00/02228
- (22) International Filing Date: 8 June 2000 (08.06.2000) (81) Designated States (*national*): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 9913783.8 14 June 1999 (14.06.1999) GB (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant (*for all designated States except US*): LATCHWAYS PLC [GB/GB]; Hopton Park, Devizes, Wiltshire SN10 2JP (GB).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): FLUX, Peter, Robert [GB/GB]; Leanaroy, Glenspean Park, Roy Bridge, Inverness-Shire PH31 4AS (GB).
- Published:
— With international search report.

[Continued on next page]

(54) Title: REMOVABLE HEIGHT SAFETY APPARATUS

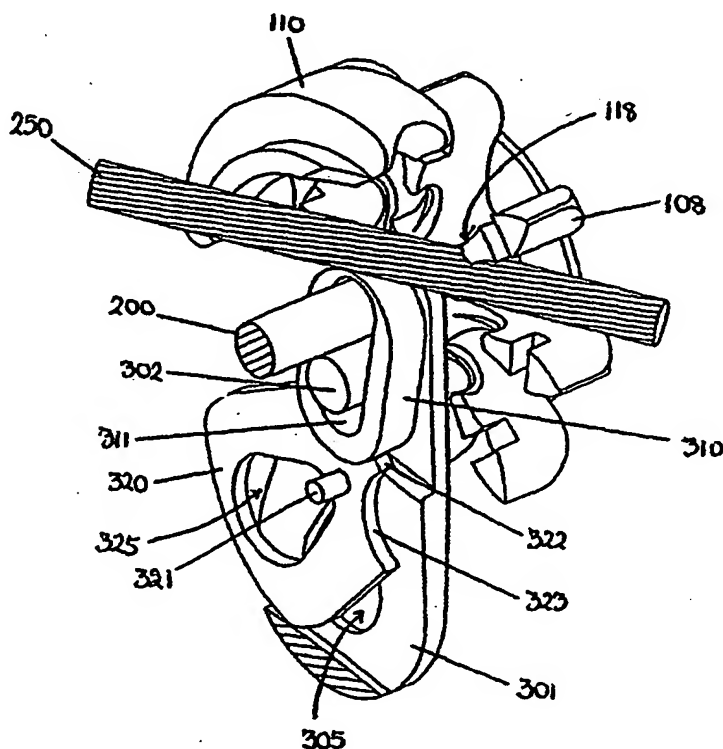

(57) Abstract: A removable load transfer device (100) for use in height safety apparatus comprises: spaced-apart rotary members (101, 102) sharing an axis of rotation (200), each having a hub portion and at least one recess (107, 108) in its periphery; slipper (110) extending between the rotary members (101, 102) and defining therewith space (150) for receiving elongate element (250) on which the device (100) travels, in use; attachment means (300) for attaching a load to the device (100), and access means to enable element (250) to be introduced into or removed from space (150) to allow the device (100) to be attached to or detached from element (250); and is characterised in that said access means comprises at least one notch (117, 118) in the hub of each rotary member (101, 102) and in that attachment means (300) comprises a moveable link assembly operable between: (a) a blocking position in which it prevents access to notches (117, 118) by said element (250), and (b) a release position in which it allows access to notches (117, 118) by said element (250), whereby said slipper (110) is enabled to pass the element (250) to cover or expose space (150) according to whether device (100) is being attached to or released

from the element (250).